

TECHNICAL DATA SHEET - KARWELL



with rubber edge



without edge



open bottom



closed bottom




The large Karwell mat is made of resilient rubber with an opened or closed bottom. Its appearance resembles a honeycomb.

Colour brushes can be purchased additionally to form a simple logo or mosaic.

Suitable for passenger cars!

Fire-resistant version

Karwell mat with a non-flammable rubber may be used for emergency exits. Reaction to fire: Bfl-s1

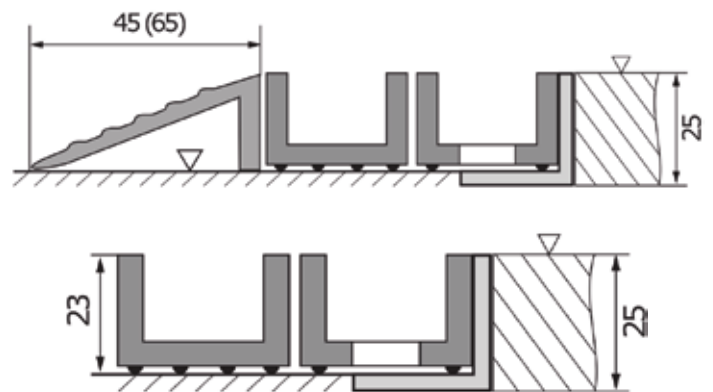

Technical parameters

| | |
|----------------------|---|
| Design: | with tapered rubber frame, with tapered Al frame, without tapered frame, opened bottom, closed bottom |
| Size: | according to the client's requirements, basic module 150 × 100cm (larger dimensions are achieved by bonding) |
| Height: | 23 mm |
| Material: | natural rubber |
| Weight: | with open bottom – 13.3 kg/m ² , with closed bottom – 14.8 kg/m ² |
| Installation: | at floor level in Al-frame 25 × 25 × 3mm or freely placed on the floor with aluminium tapered frame - width of 45mm (up to 120cm), 65mm or with a 45mm rubber taper. The mat can be anchored to the base using the anchoring set. |
| Resistance: | suitable for any loading (without colour brushes) |
| Use: | for entrance areas of car showrooms, shopping centers, office buildings, ski resorts (cable car platforms) etc. |

