

TECHNICAL DATA SHEET - Oktava




Rubber mat in the shape of a honeycomb, smaller holes. Mat height 12,5 mm.

mat Oktava mat with opened bottom is intended for areas with a long-term heavy traffic. It resists extreme climate conditions and various chemicals. It is used mainly as an entrance mat to absorb rough dirt. It can be also used as an anti-fatigue mat for the machines and production lines in the workshops.



coupler

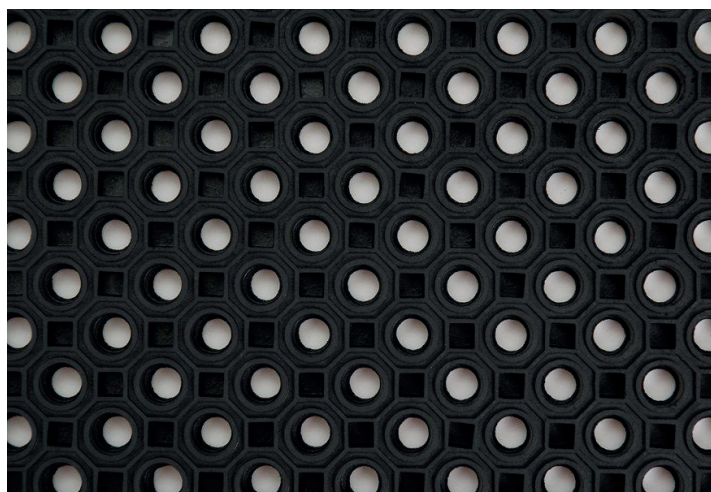

variant with rubber ramp



Technical parameters

Size and design:	according to the client's requirements, basic module 150 × 100cm (larger dimensions are achieved by bonding)
Height:	12.5 mm
Material:	resilient rubber
Weight:	10 kg/m ²
Colour:	Black
Installation:	at floor level in a prepared hole fitted with a 15 × 30 × 2 mm aluminium frame or loosely laid on the ground with a 20 mm wide rubber strip, optionally in a 45 mm wide aluminium ramp frame.
Use:	in the entrance areas of car dealerships, shopping centres, office buildings and ski resorts (cable car platforms), etc.