

TECHNICAL DATA SHEET - Outwell





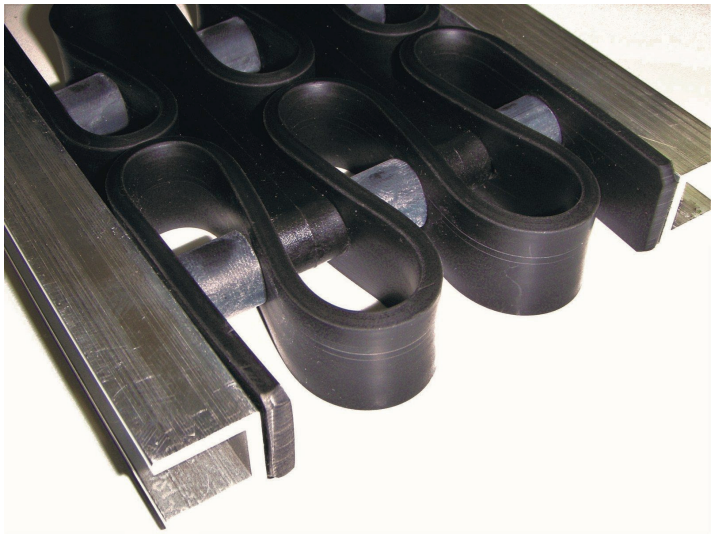

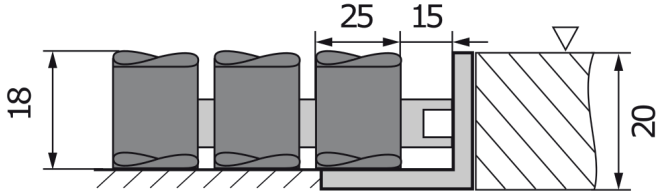

The foundation of this mat are PVC sections placed around the stainless steel wire. They form segments that are mutually connected with plastic connectors. The size of the mat is random, from our experience we recommend rectangular shapes. It can be placed freely on the floor in a tapered frame, or embedded into the floor/paving in an embedded frame.

The mat is self-cleaning – coarse dirt wiped off falls into the mat and can be easily swept or vacuumed out after the mat is rolled up. The mat is usable on both sides, which extends its lifespan. It is not self-supporting and must lie flat on an even surface.

It is used in the first cleaning zone to remove coarse dirt (stones, mud).

ZÚS® tayllorcox ISO 9001 Quality Management tayllorcox ISO 27001 Information Security Management tayllorcox ISO 14001 Environmental Management

Technical parameters

Size and design:	according to the client's requirements
Height:	18 mm
Material:	polished (or anodized) aluminium sections, smooth PVC band, stainless steel wire
Colour:	Black
Weight:	18 kg/m²
Installation:	at floor level in L-frame 20 × 30 × 3 mm or stainless steel frame 20 × 20 × 3 mm or freely placed on the floor with 65mm wide aluminium tapered frame
Use:	entrance areas to hotels, banks, restaurants, office buildings, as well as family homes