

TECHNICAL DATA SHEET - Topwell 10 Extra




grooved PVC / aluminium scraper / textile

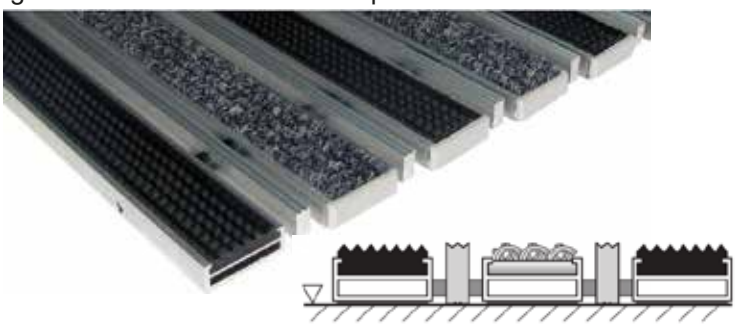


grooved PVC / Y-shaped aluminium

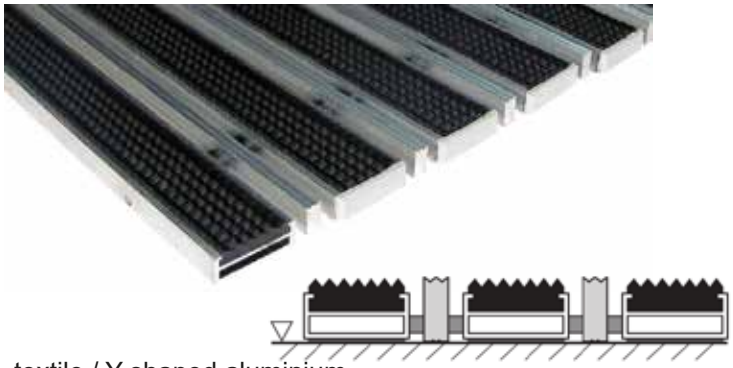

textile / Y-shaped aluminium

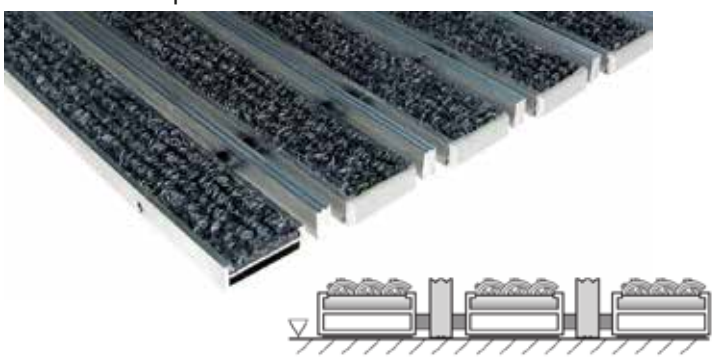

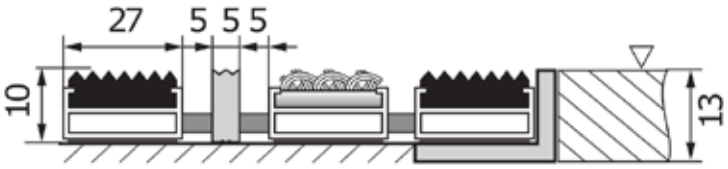

The foundation of Topwell 10 mm Extra mats are 27 mm wide aluminium sections connected by a stainless steel wire and separated by rubber rings, which make it possible to roll the mat for easier handling when cleaning.

The aluminium sections can be infilled with grooved PVC or textile strips are inserted into the aluminium sections, and can be combined with aluminium scrapers where necessary.

Individual fillings can be freely combined and replaced after wear.

Not suitable for revolving doors.

Fire-resistant version
Topwell 10 mm Extra mats can be used for emergency exits with a fire-resistant infill and are certified according to EN 13501-1+A1:2010.
Reaction to fire certification: Bfl-s1

Technical parameters

Design:	grooved PVC strip, textile strip, aluminium scraper
Dimensions:	according to the client's requirements
Height:	10 mm
Weight:	11 kg/m²
Instalation:	at floor level in a 13 × 30 × 3 mm L-frame or freely placed on the floor with a 45 mm wide tapered aluminium frame
Resistance:	static load up to 2.5 t / 100 cm², not suitable for pallet trucks and forklift traffic
Use:	for very heavily frequented and heavily loaded entrances of shopping centers and department stores, for entrance areas of hotels, banks, restaurants, administrative buildings, as well as in front of family houses

GAPA MB s.r.o. Svatovítská 217 | 293 01 Mladá Boleslav | T/F 326 735 428, 326 721 006 | www.gapa.cz