
# TECHNICAL DATA SHEET – Topwell 22 Super

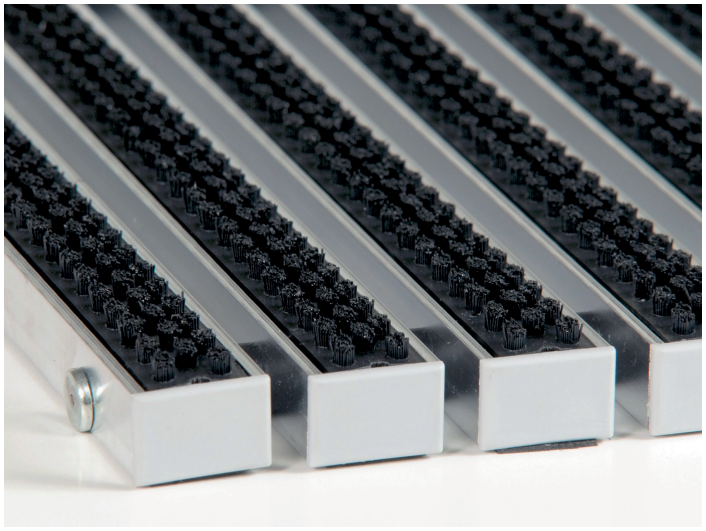



The foundation of Topwell 22 mm Super mats is 27 mm wide aluminium sections, which are connected by a stainless steel wire and separated by rubber rings, making it possible to roll the mat for better handling when cleaning.


Brush strips are firmly inserted into the aluminium sections.


The brush strips can be replaced after wearing.

**Fire-resistant version**
Topwell 22 mm Super mat with a non-flammable rubber filling may be used for emergency exits and is certified to EN 13501-1+A1:2010. Reaction to fire: Cfl-s2

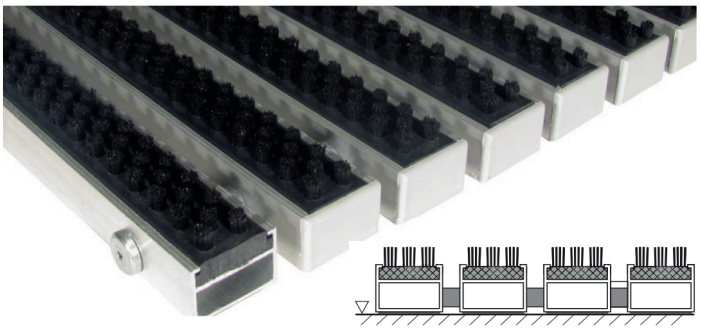

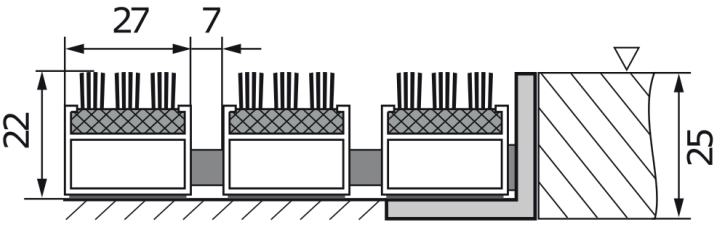

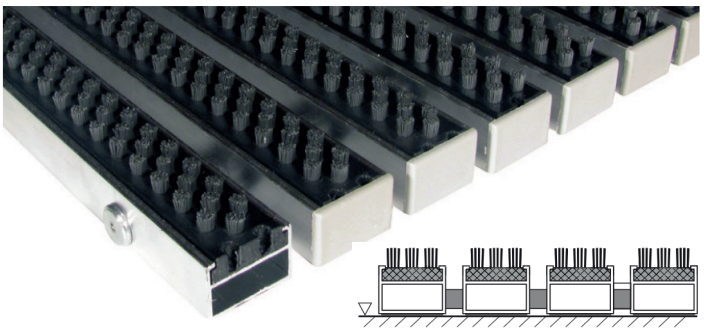
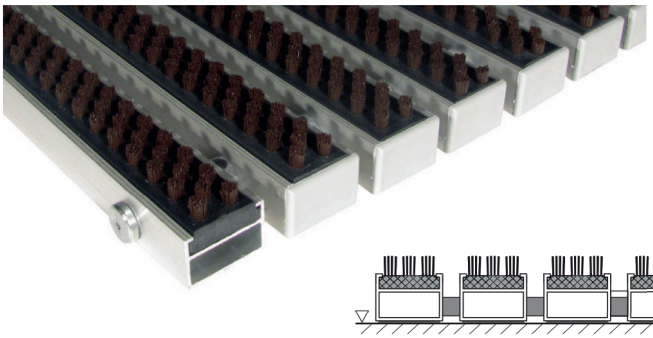
## Technical data

| | |
|---|---|
| **Design:** | brush strips |
| **Dimensions:** | according to the client's requirements |
| **Height:** | 22 mm |
| **Weight:** | 16 kg / m² |
| **Installation:** | at floor level in L-frame 25 / 25 / 3 mm or freely placed on the floor with aluminium tapered frame - width of 45mm (up to 120cm) or 65mm |
| **Resistence:** | static load up to 7 t / 100 cm², not suitable for pallet trucks and forklift traffic |
| **Use:** | for very heavily frequented and heavily loaded entrances of shopping centers and department stores, for entrance areas of hotels, banks, restaurants, administrative buildings, as well as in front of family houses |

ZÚS® tayllorcox ISO 9001 Quality Management tayllorcox ISO 27001 Information Security Management tayllorcox ISO 14001 Environmental Management